





MD SERIES
12MD-1.3 (12V1.3AH)

FEATURES

- *Maintenance Free
- *Leak Proof/ Spill Proof
- *Gas Recombination
- *Absorbed Electrolyte
- *Float/ Cycle Use
- *Low Self Discharge Rate
- *Safety Valve
- *Lead Calcium Alloy
- *Useable In Any Position
- *Rugged Design
- *Available Flame Retardant Material(Optional)

Nominal Voltage		
Rated Capacity (20 Hour Rate)		
Dimensions	Length	97mm (3.82inches)
	Width	45mm (1.77inches)
	Height	53mm (2.09inches)
	Total Height	59mm (2.32inches)
	Weight	0.6kg(1.32lbs)
Standard Terminals	ST1 (FASTON TAB No.187)	



VRLA 12V1.3Ah - Specifications				
Nominal Voltage	Rated Capacity @20hr rate	Maximum Charge Rate	Maximum Discharge- Amps 5sec.	Internal Resistance
12V	1.3Ah	0.3Amps	8Amps	105Mili Ohms
Capacity@ 77 F(25 C)	1.30Ah @ 20 hour rate (65mA) to 1.75 volts per cell			
	1.20Ah @ 10 hour rate (120mA) to 1.75 volts per cell			
	1.10Ah @ 5 hour rate (220mA) to 1.75 volts per cell			
	1.02Ah @ 3 hour rate (340mA) to 1.75 volts per cell			
	0.75Ah @ 1 hour rate (770mA) to 1.75 volts per cell			
Operating Temperature Range	Discharge	-4 F (-20°C) to + 140 F (60°C)		
	Charge	14 F (-10°C) to + 122 F (50°C) ,(with temperature compensation)		
Recomended Operating Temperature Range	+68 F (20°C)to + 77 F (25°C)			
Charging (Constant Voltage)	Cycle use	Initial Current0.36Amps (recommended).		
		Voltage 14.5-14.9Volts @77 F (25 C)		
	Float use	Voltage13.6-13.8Volts @77 F (25 C)		
Self Discharge @ 77 F (25 C)	Capacity after 3 month storage	90%		
	Capacity after 6 month storage	80%		
	Capacity after 12 month storage	60%		
	CCB Battery may be stored for up to 12 months at 77 F(25°C) and then a freshing charge is required. For higher temperatures the time interval will be shorter.			
Capacity affected by Temperature (20 hour rate)	104 F (40°C)	102%		
	77 F (25°C)	100%		
	32 F (0°C)	85%		
	58 F (-15°C)	65%		
Charge Method (Constant Voltage)	Cycle use (Repeating use)	Initial current	0.25A or smaller	
		Control voltage	14.5V to 14.9V	
	Trickle use	Initial current	0.11A or smaller	
		Control voltage	13.6V to 13.8V	

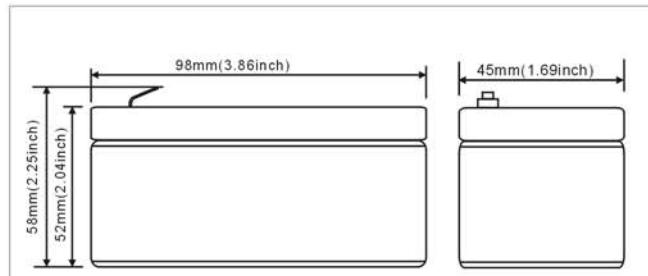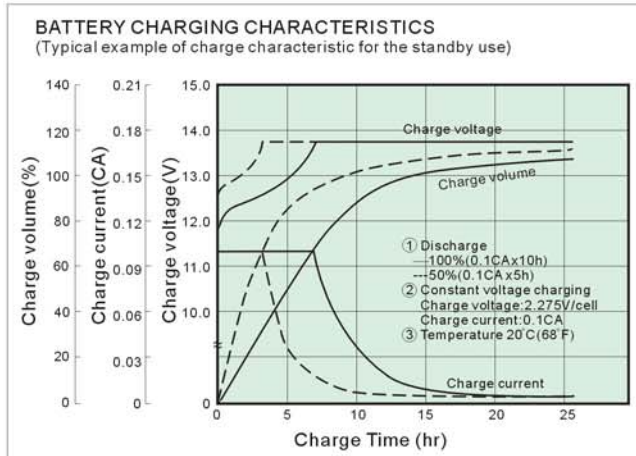

OUTER DIMENSIONS




TERMINAL TYPE mm (inch)

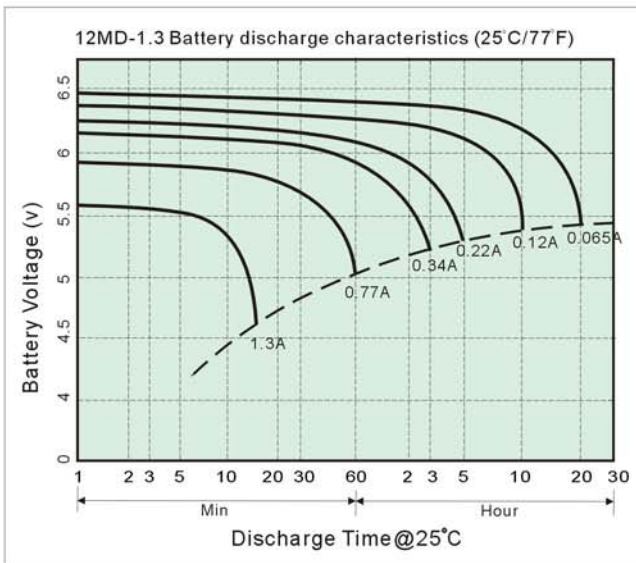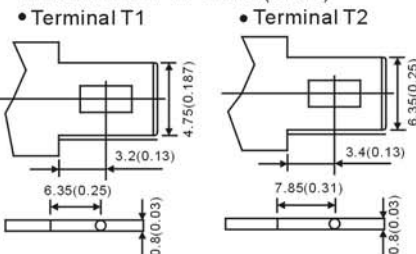

Constant power discharge characteristics at 25°C/77°F

End V/cell	Discharge time							
	5Min	10Min	15Min	30Min	1Hr	3Hr	5Hr	10Hr
1.75V	7.7	5.4	4.0	2.25	1.2	0.68	0.43	0.11
1.70V	8.1	5.5	4.1	2.3	1.23	0.7	0.45	0.12
1.60V	8.4	5.6	4.19	2.34	1.33	0.72	0.46	0.13

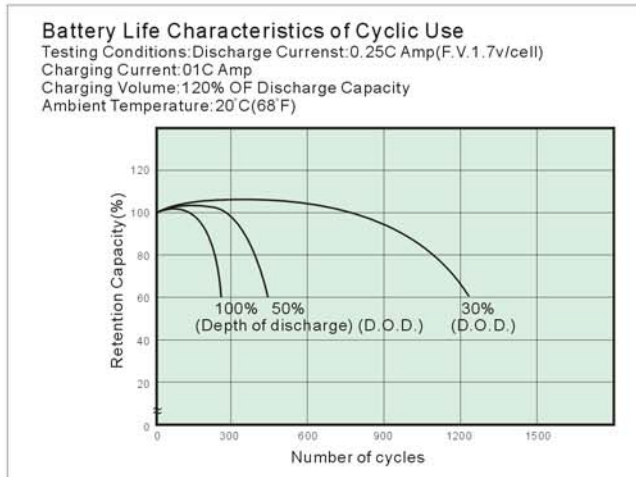

Charging Procedure

Application	Charging method	Charging Voltage at 20°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/Ccell)	Max. charging current (CA)	Charging time 0.1CA, 20°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power source	Constant voltage & Constant current charging	2.25~2.30	-3	0.2	24	20	0~40 (32~104°F)
For cycle service	(with current restriction)	2.40~2.0	-4	0.2	16	10	

CCB INDUSTRIAL BATTERY CO., LTD

CCB CHINA

Shenzhen, China 518001
 Tel: 86-755-82297502 82297504
 Fax: 86-755-82297586
 E-mail: sales@battery-oem.com
 WEBSITE:
<http://www.battery-oem.com>

CCB USA

Phoenix Arizona 85054 USA
 Tel: 1-480-513-0808
 Fax: 1-480-563-9264
 E-mail: ccbbatteries@att.net
 WEBSITE:
[http://www.ccbattery.com](http://www.ccbbattery.com)

